Greecon
SH.P.K


H

HARDWARE LIST · KIT H

Hardware for a hotel or guesthouse

Every part of the kit for a hotel or a guesthouse with a water tank, solar on the roof and a grid connection: what each part does there, how many, how it qualifies, and which sheet to open.

KIND OF SITE	Hotel or guesthouse: water, solar and grid
FOR	The project manager who plans and buys the kit, and the founder who approves the purchase
GOES WITH	The hardware sheets HW01 to HW17, one for each part, and the site pack for this kind of site (PDF 04)
COVERS	What is measured and where · every part of the kit, with its sheet · the parts this kind of site does not use · the numbers on the data cable · what the survey decides

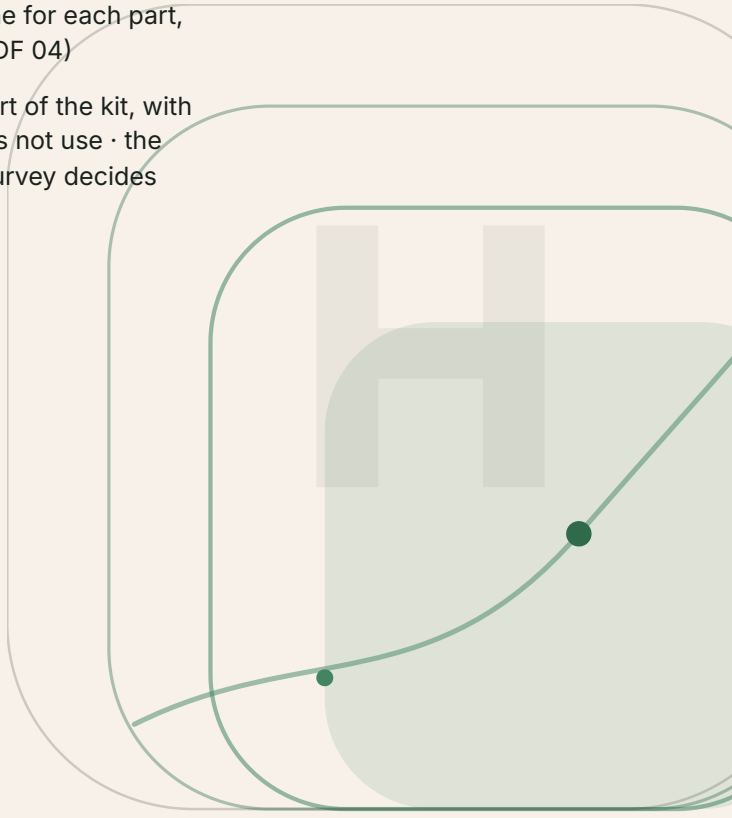

Version 1.0 · 10 November 2026

Greecon Sh.p.k · Durana Tech Park · info@greecon.earth

KIT H

Hardware for a hotel or guesthouse

A hotel or a guesthouse with a water tank and its pump, solar on the roof and a grid connection: the usual first site. Greecon measures what is bought from the grid and what is sent to it, what the solar plant produces, how full the tank is, the pressure in the pipe and, where the parts are fitted, the pump's flow and whether the pump runs. This list is every part of the kit for that, with the sheet that says how each one qualifies.

What is measured, and where

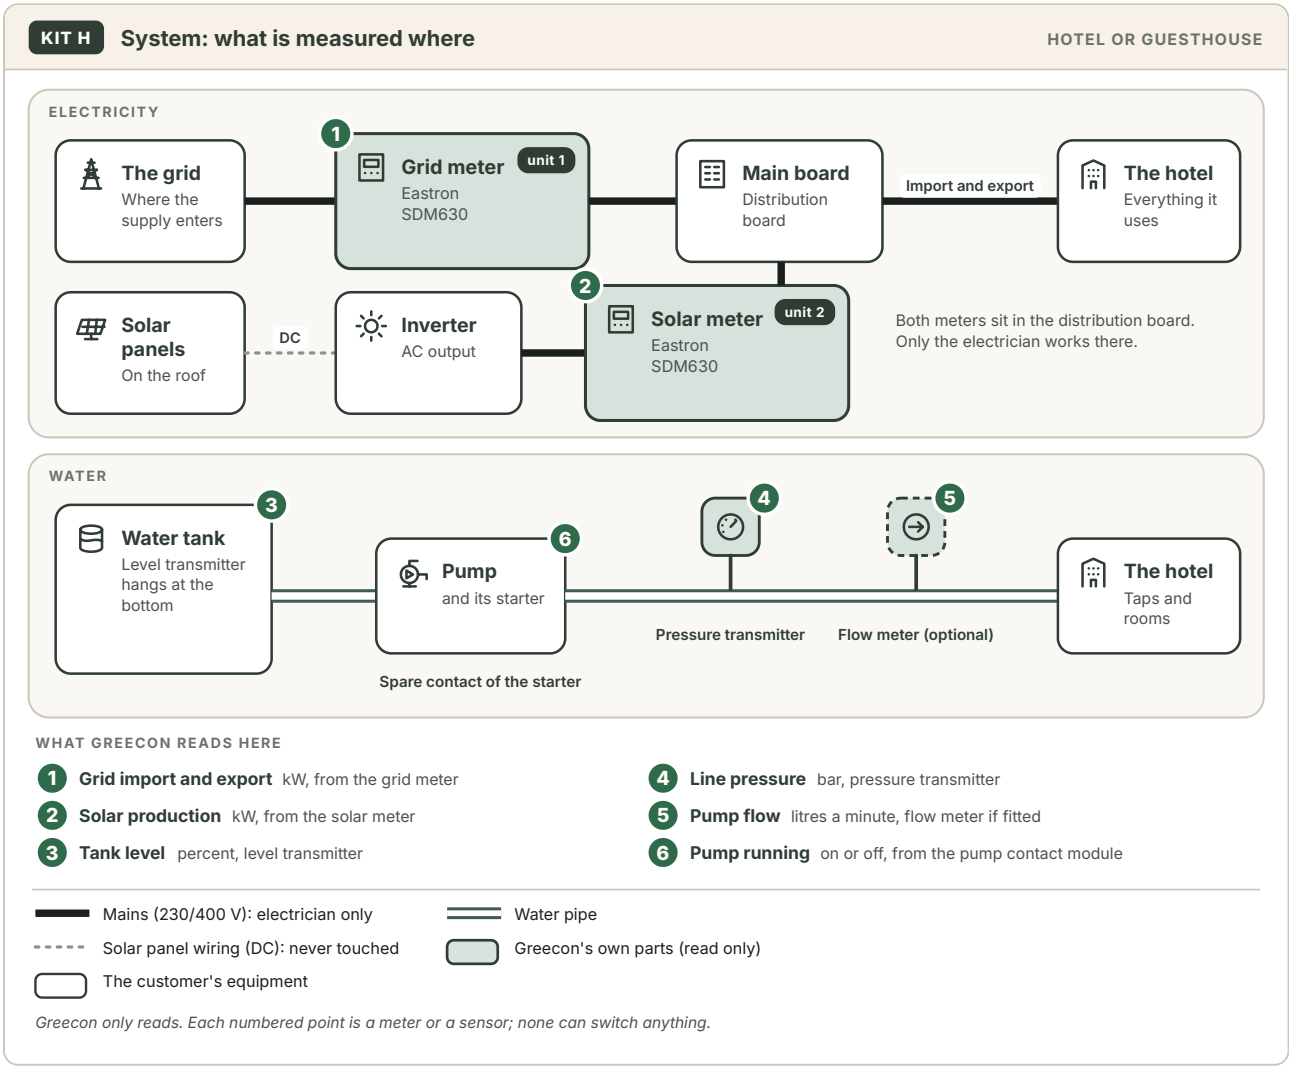


Figure H-1. Kit H, hotel or guesthouse. System: what is measured where. The numbers mark what Greecon reads; they are listed under the drawing.

The kit, part by part

Sheet	Hardware	In the kit	How many	What it does at this kind of site
HW01	**Box** By specification · EUR 180 to 300	IN THE KIT	1	In the plant room. It reads the grid meter, the solar meter, the water module and the pump contact module: four devices, seven readings.
HW02	**Converter** By specification · EUR 30 to 60 (basic) or 250 and up (industrial)	IN THE KIT	1	In the enclosure. Behind it, on one cable: the grid meter (number 1), the solar meter (2), the water module (3) and the pump contact module (5).
HW03	**Data cable and labels** By specification · EUR 40 to 80	IN THE KIT	1 lot	One run from the converter through the grid meter and the solar meter (in the board, where the electrician connects it) and the water module to the pump contact module.
HW04	**Cellular router** By specification · EUR 150 to 200	OPTIONAL	0 or 1	Only where the building has no internet the box may use. Most hotels have a router: then the box and the converter plug into that.
HW05	**Eastron SDM630 three-phase meter** Approved model · EUR 90 to 180 each	IN THE KIT	2	Two. The grid meter (number 1), where the supply enters, gives Grid import and Grid export. The solar meter (number 2), on the inverter’s AC output, gives Solar production.
HW08	**Waveshare 4 to 20 mA module** Approved model · EUR 30 to 60	IN THE KIT	1	One. Input 1 takes the tank’s level transmitter, input 2 the pipe’s pressure transmitter, input 3 the flow meter if there is one. It gives Tank level, Line pressure and Pump flow.
HW09	**Waveshare pump contact module** Approved model · EUR 30 to 60	IN THE KIT	1	One: it reads a spare running contact of the water pump’s starter and gives Pump running. Leave it out if the starter has no spare contact, and say so at handover.
HW10	**Level transmitter** By specification · EUR 120 to 400	IN THE KIT	1	One, at the bottom of the hotel’s water tank. Only a transmitter with wetted parts approved for drinking water goes into a drinking-water tank. It gives Tank level.
HW11	**Pressure transmitter** By specification · EUR 40 to 150	IN THE KIT	1	One, on the pipe the pump feeds. It gives Line pressure.
HW12	**Flow meter** By specification · EUR 150 to 500	OPTIONAL	0 or 1	With the pump contact module it makes the no-flow alert possible: the pump is running but no water is flowing.

Sheet	Hardware	In the kit	How many	What it does at this kind of site
HW15	**24 V power supply** By specification · EUR 25 to 50	IN THE KIT	1	One, in the enclosure. It feeds the two modules, the transmitters' loops and the converter, and the box if the box takes 9 to 36 V.
HW16	**UPS** By specification · EUR 60 to 150	IN THE KIT	1	One. It keeps the box and the converter running through a short power cut. A 600 VA UPS keeps the 24 V supply up too, so the tank and the pressure are still read.
HW17	**Enclosure and fittings** By specification · EUR 80 to 150	IN THE KIT	1	One: the fuses and the 24 V supply on the mains side; the converter, the 4 to 20 mA module and the pump contact module on the low-voltage side; the terminal blocks and, if there is room, the box.

About EUR 800 to 1,800; typically 1,100 to 1,300. Add the electrician's time (half a day to a day) and yours. The figures are planning estimates, not quotes.

Sheet	Hardware	Why it is not in this kit
HW06	**Eastron SDM230 single-phase meter**	Not in the standard kit, which is three-phase. On a single-phase supply it takes the SDM630's place at the grid connection (number 1) and on the inverter's output (number 2). Find equipment says which model it found.
HW07	**Battery system**	The hotel template has no battery.

Never at this kind of site: HW13 Soil moisture probe; HW14 Temperature and humidity sensor.

The numbers on the data cable

Number	Device	What it is	Sheet
1	Grid meter	Eastron SDM630, where the supply enters. An Eastron SDM230 on a single-phase supply	HW05 and HW06
2	Solar meter	Eastron SDM630, on the inverter's output. An Eastron SDM230 on a single-phase plant	HW05 and HW06
3	4 to 20 mA module	Waveshare Modbus RTU Analog Input 8CH. The platform calls it the Water I/O module	HW08
5	Pump contact module	Waveshare Modbus RTU IO 8CH	HW09

Everything on the cable is set to 9600 baud, 8 data bits, no parity, 1 stop bit, and the converter to port 502, in Modbus TCP to RTU gateway mode. Every number is set at the office, before the kit leaves.

What the survey decides

Ask, or look	It decides
Is the supply three-phase, and how many amps a phase?	The meters. Up to 100 A a phase: the SDM630 MCT, with clamps. Above that: the SDM630 with 5 A current transformers. A single-phase supply: the SDM230 (sheets HW05 and HW06)
How tall is the tank inside, and does it hold drinking water?	The level transmitter’s range, and what it may be made of (sheet HW10)
What pressure does the pipe see?	The pressure transmitter’s range (sheet HW11)
Has the pump’s starter a spare contact that follows the pump?	Whether the pump contact module is fitted (sheet HW09)
Does the owner want to be told when the pump runs and no water flows?	The flow meter, which needs the pump’s contact as well (sheet HW12)
Is there internet the box may use, where the enclosure will be?	The cellular router (sheet HW04)
Where does the enclosure go, and is the place dry?	IP54 or IP65 (sheet HW17)

The whole job at this kind of site, from the survey to the handover, is in the site pack for a hotel or guesthouse (PDF 04).