Greecon
SH.P.K


S

HARDWARE LIST · KIT S

Hardware for a solar plant with grid connection

Every part of the kit for a solar plant with a grid connection, with or without a battery: what each part does there, how many, how it qualifies, and which sheet to open.

KIND OF SITE	Solar plant with grid connection: solar and grid, with an optional battery
FOR	The project manager who plans and buys the kit, and the founder who approves the purchase
GOES WITH	The hardware sheets HW01 to HW17, one for each part, and the site pack for this kind of site (PDF 05)
COVERS	What is measured and where · every part of the kit, with its sheet · the parts this kind of site does not use · the numbers on the data cable · what the survey decides

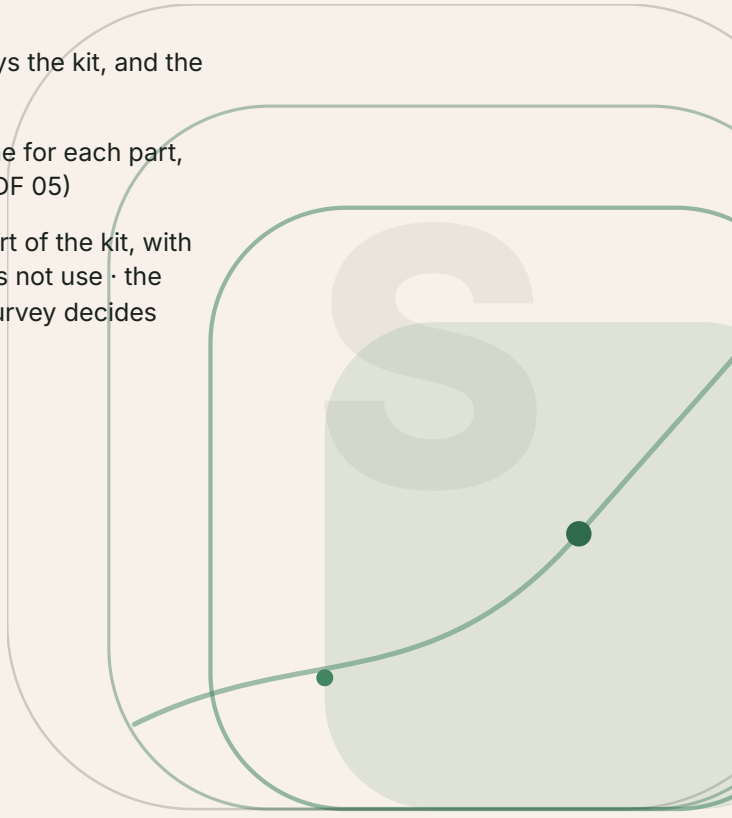

Version 1.0 · 10 November 2026

Greecon Sh.p.k · Durana Tech Park · info@greecon.earth

KIT S

Hardware for a solar plant with grid connection

A solar plant with a grid connection, with or without a battery. Greecon measures what is bought from the grid and what is sent to it, and what the plant produces. Where the owner wants it, a third meter measures the site's own consumption; without it Greecon works the consumption out. A battery is the customer's own equipment, and is read only if its maker publishes its register table. This list is every part of the kit for that, with the sheet that says how each one qualifies.

What is measured, and where

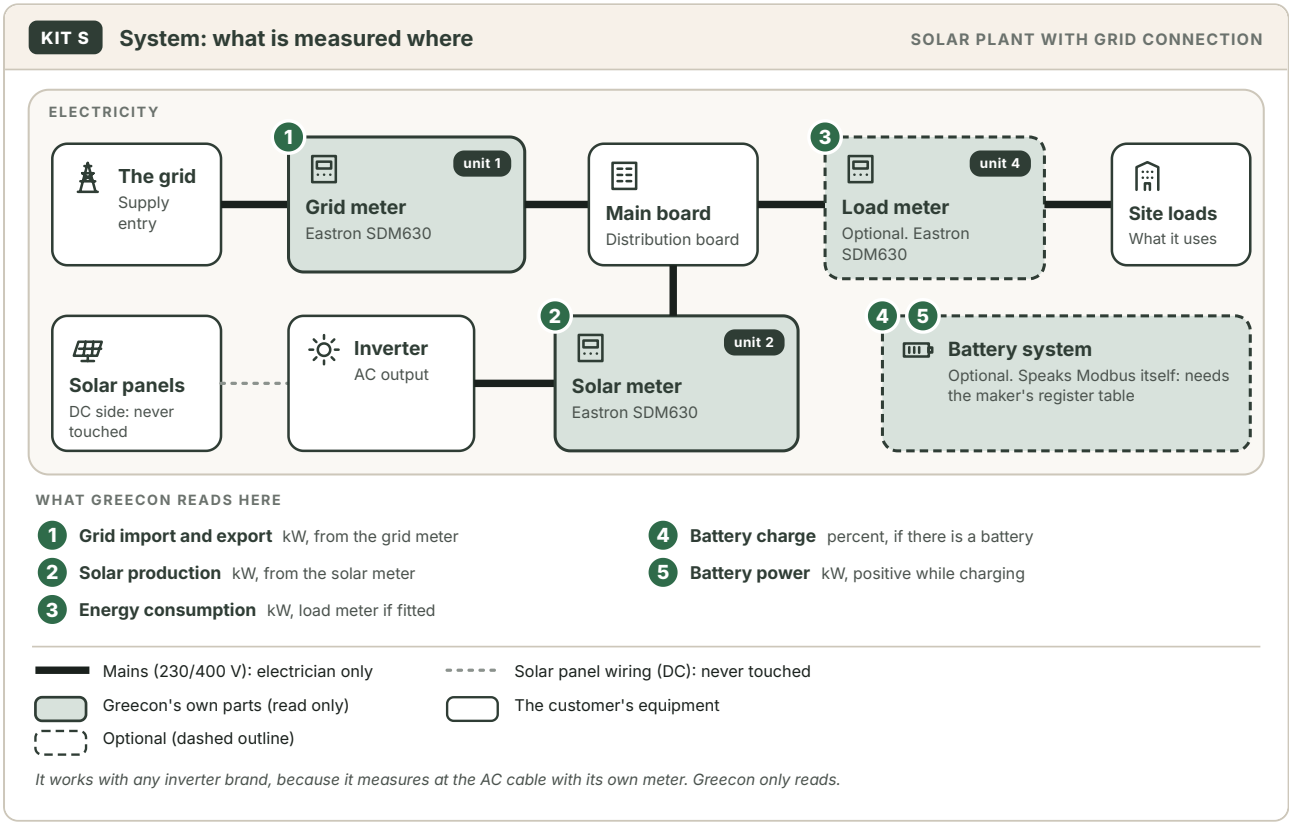


Figure S-1. Kit S, solar plant with grid connection. System: what is measured where. The dashed boxes are optional.

The kit, part by part

Sheet	Hardware	In the kit	How many	What it does at this kind of site
HW01	**Box** By specification · EUR 180 to 300	IN THE KIT	1	Near the main board or the inverter. It reads the grid meter and the solar meter and, where they are fitted, the load meter and the battery.
HW02	**Converter** By specification · EUR 30 to 60 (basic) or 250 and up (industrial)	IN THE KIT	1	In the enclosure. Behind it: the grid meter (1), the solar meter (2) and, if fitted, the load meter (4). A battery that speaks Modbus on its own network address does not need the converter; one on RS-485 joins the cable with a number of its own.
HW03	**Data cable and labels** By specification · EUR 40 to 80	IN THE KIT	1 lot	One run from the converter through the grid meter, the solar meter and, if fitted, the load meter. Every end at a meter is the electrician's.
HW04	**Cellular router** By specification · EUR 150 to 200	OPTIONAL	0 or 1	Only without usable internet. The hardware guide's own list for this kit does not show one; the network rules are the same as for every kit.
HW05	**Eastron SDM630 three-phase meter** Approved model · EUR 90 to 180 each	IN THE KIT	2, or 3	Two, as at a hotel: the grid meter (1) and the solar meter (2). A third (number 4) on the feed to the loads if the owner wants the site's own consumption measured and not worked out.
HW07	**Battery system** By register table · Nothing to buy: it is the customer's own	OPTIONAL	0 or 1	The template's Battery system (optional). Two readings are mapped by hand: Battery charge and Battery power. If the plant has no battery, remove the device.
HW15	**24 V power supply** By specification · EUR 25 to 50	IN THE KIT	1	One. With no module and no loop, it feeds the converter, and the box if the box takes 9 to 36 V.
HW16	**UPS** By specification · EUR 60 to 150	IN THE KIT	1	One. It keeps the box and the converter running. The meters are powered from what they measure: in a grid cut they go dark, and the box says that they do not answer.
HW17	**Enclosure and fittings** By specification · EUR 80 to 150	IN THE KIT	1	One, the smallest: the fuses and the supply, the converter, the terminal blocks and, if there is room, the box. The meters are in the distribution board, not here.

About EUR 600 to 1,200. The figures are planning estimates, not quotes. For a battery nothing is bought but the maker's register table.

Sheet	Hardware	Why it is not in this kit
HW06	**Eastron SDM230 single-phase meter**	As at a hotel: only on a single-phase plant, in the SDM630's place, with the same numbers (grid 1, solar 2, load 4).
HW08	**Waveshare 4 to 20 mA module**	A solar plant has no water side.
HW09	**Waveshare pump contact module**	A solar plant has no pump to watch.
HW10	**Level transmitter**	A solar plant has no water side.
HW11	**Pressure transmitter**	A solar plant has no water side.
HW12	**Flow meter**	A solar plant has no water side.

Never at this kind of site: HW13 Soil moisture probe; HW14 Temperature and humidity sensor.

The numbers on the data cable

Number	Device	What it is	Sheet
1	Grid meter	Eastron SDM630, where the supply enters. An Eastron SDM230 on a single-phase supply	HW05 and HW06
2	Solar meter	Eastron SDM630, on the inverter's output. An Eastron SDM230 on a single-phase plant	HW05 and HW06
4	Load meter, or pump meter	Eastron SDM630 on the site's own consumption, or Eastron SDM230 on a single-phase pump	HW05 and HW06

A battery that joins the data cable takes a number of its own, entered by hand (for example 8). One that is on the site's network at an address of its own has no number on the cable. Everything on the cable is set to 9600 baud, 8 data bits, no parity, 1 stop bit, and the converter to port 502, in Modbus TCP to RTU gateway mode.

What the survey decides

Ask, or look	It decides
Is the supply three-phase, and how many amps a phase?	The meters. Up to 100 A a phase: the SDM630 MCT, with clamps. Above that: the SDM630 with 5 A current transformers. A single-phase plant: the SDM230 (sheets HW05 and HW06)
Where are the supply entry and the inverter’s AC output?	Where the grid meter and the solar meter go, and how far the data cable runs (sheet HW03)
Does the owner want the site’s own consumption measured, and not worked out?	A third meter, number 4 (sheet HW05)
Is there a battery, and will its maker give the Modbus register table?	Whether the battery is read at all (sheet HW07)
May the plant send energy to the grid?	Nothing to buy. It is entered with the site’s prices, and it explains a solar reading that is low at midday
Is there internet the box may use, where the enclosure will be?	The cellular router (sheet HW04)

The whole job at this kind of site, from the survey to the handover, is in the site pack for a solar plant (PDF 05).