Greecon
SH.P.K


W

HARDWARE LIST · KIT W

Hardware for a water tank and pump station

Every part of the kit for a water tank and pump station: what each part does there, how many, how it qualifies, and which sheet to open.

KIND OF SITE	Water tank and pump station: tank, pump and the pipe it feeds
FOR	The project manager who plans and buys the kit, and the founder who approves the purchase
GOES WITH	The hardware sheets HW01 to HW17, one for each part, and the site pack for this kind of site (PDF 07)
COVERS	What is measured and where · every part of the kit, with its sheet · the parts this kind of site does not use · the numbers on the data cable · what the survey decides

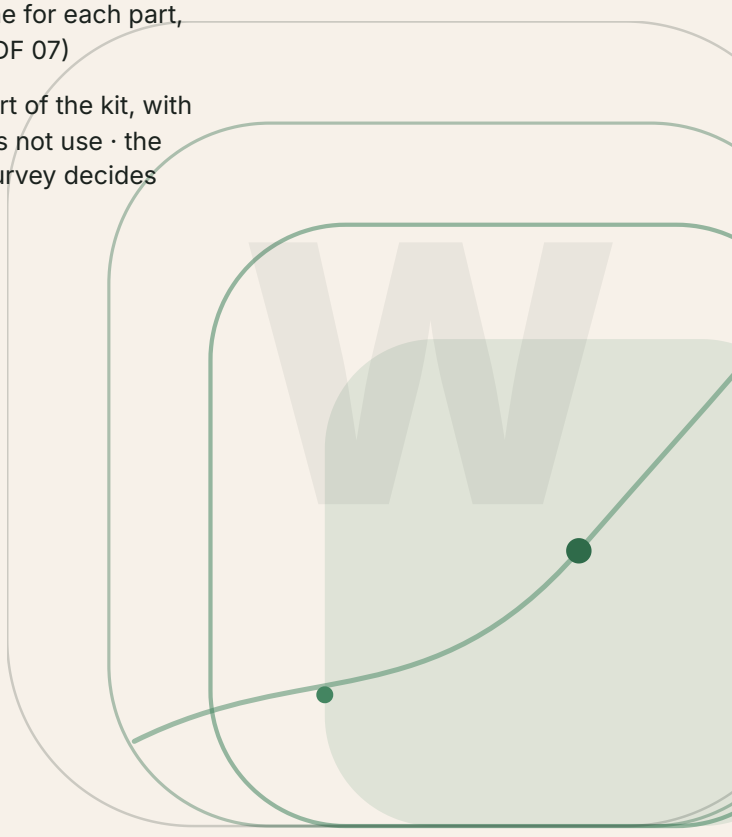

Version 1.0 · 10 November 2026

Greecon Sh.p.k · Durana Tech Park · info@greecon.earth

KIT W

Hardware for a water tank and pump station

A water tank, a pump and the pipe it feeds. Greecon measures how full the tank is, the pressure in the pipe, whether the pump runs and, where the parts are fitted, the pump's flow and the electricity the pump uses. With the flow meter and the pump's running contact together, Greecon can say that the pump is running but no water is flowing. This list is every part of the kit for that, with the sheet that says how each one qualifies.

What is measured, and where

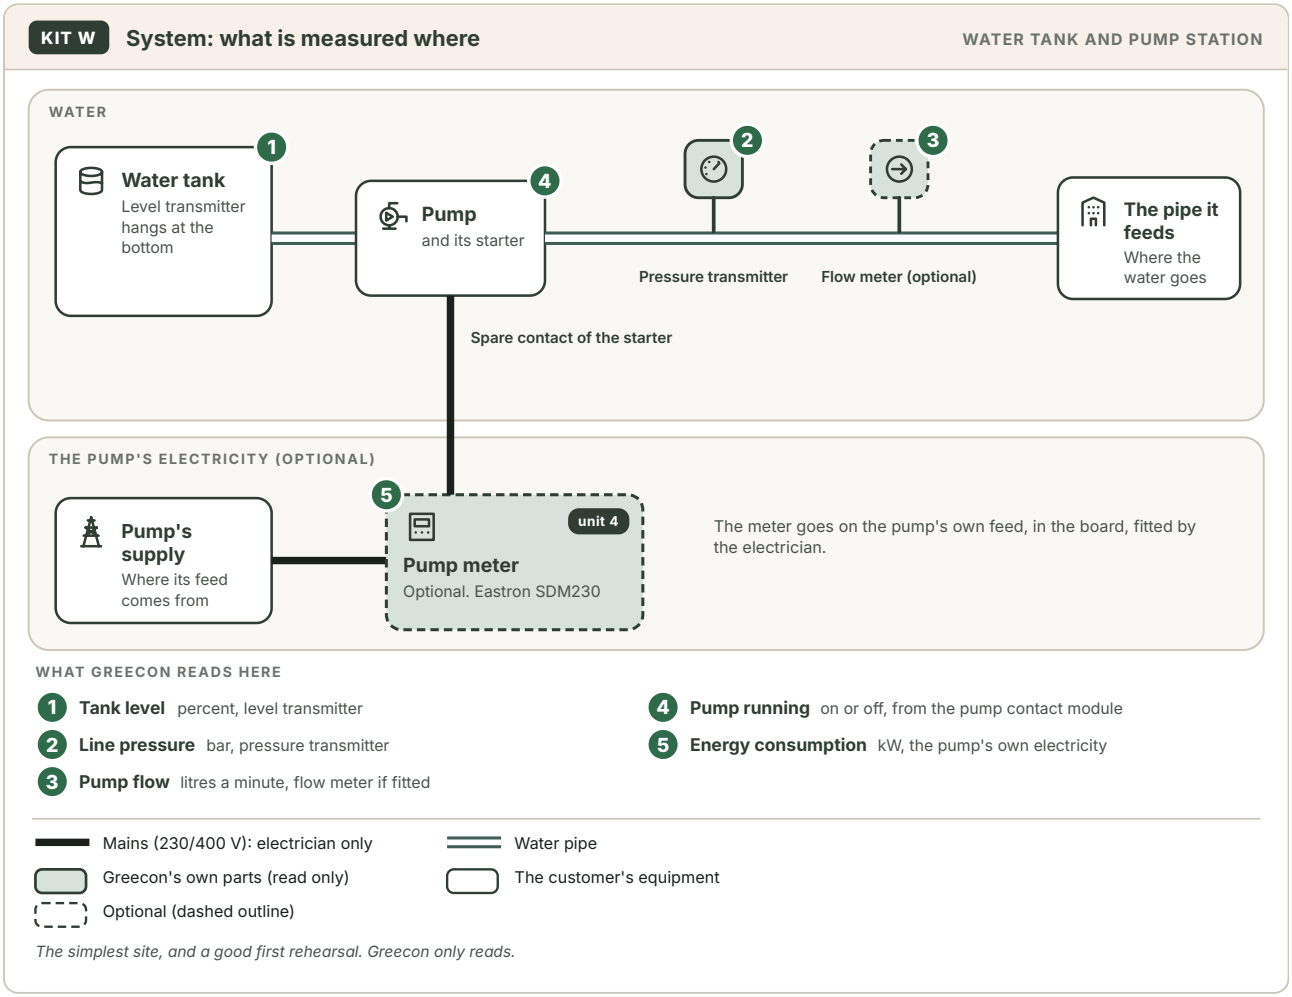


Figure W-1. Kit W, water tank and pump station. System: what is measured where. The dashed parts are optional.

The kit, part by part

Sheet	Hardware	In the kit	How many	What it does at this kind of site
HW01	**Box** By specification · EUR 180 to 300	IN THE KIT	1	In the pump house or the plant room. It reads the water module, the pump contact module and, if one is fitted, the pump meter.
HW02	**Converter** By specification · EUR 30 to 60 (basic) or 250 and up (industrial)	IN THE KIT	1	In the enclosure. Behind it: the water module (3), the pump contact module (5) and, if fitted, the pump meter (4).
HW03	**Data cable and labels** By specification · EUR 40 to 80	IN THE KIT	1 lot	A short run inside the pump house: from the converter through the pump meter (if fitted) and the water module to the pump contact module.
HW04	**Cellular router** By specification · EUR 150 to 200	OPTIONAL	0 or 1	Only without usable internet: a pump station that stands away from the buildings.
HW06	**Eastron SDM230 single-phase meter** Approved model · EUR 35 to 60	OPTIONAL	0 or 1	On the pump’s own feed, as the pump meter (number 4). It gives Energy consumption: the pump’s electricity. For a single-phase pump; a three-phase pump takes the SDM630 (sheet HW05).
HW08	**Waveshare 4 to 20 mA module** Approved model · EUR 30 to 60	IN THE KIT	1	One, the centre of the kit: level on input 1, pressure on input 2, the flow meter on input 3 if it is fitted.
HW09	**Waveshare pump contact module** Approved model · EUR 30 to 60	IN THE KIT	1	One, for the station’s pump. Leave it out if the starter has no spare running contact.
HW10	**Level transmitter** By specification · EUR 120 to 400	IN THE KIT	1	One, in the station’s tank. If the tank holds drinking water, the drinking-water rule applies.
HW11	**Pressure transmitter** By specification · EUR 40 to 150	IN THE KIT	1	One, on the pipe the pump feeds. The pipe’s pressure range, asked at the survey, decides the transmitter’s range.
HW12	**Flow meter** By specification · EUR 150 to 500	OPTIONAL	0 or 1	The part behind a pump station’s most useful alert: pump running, no flow. Without it the handover says that the alert cannot be raised.

Sheet	Hardware	In the kit	How many	What it does at this kind of site
HW15	**24 V power supply** By specification · EUR 25 to 50	IN THE KIT	1	One, as at a hotel: the modules, the loops and the converter.
HW16	**UPS** By specification · EUR 60 to 150	IN THE KIT	1	One. A 600 VA UPS is the better choice here: it keeps the 24 V supply up too, so the tank and the pressure are still read while the power is down.
HW17	**Enclosure and fittings** By specification · EUR 80 to 150	IN THE KIT	1	One: as at a hotel. The optional pump meter sits in the board that feeds the pump, not in this enclosure.

About EUR 650 to 1,300. The figures are planning estimates, not quotes.

Sheet	Hardware	Why it is not in this kit
HW05	**Eastron SDM630 three-phase meter**	The kit measures the pump's electricity with the single-phase SDM230 (sheet HW06). A three-phase pump needs this meter in its place: remove the template's pump meter and add Eastron SDM630 on the site's own consumption (number 4) from Add equipment Greecon already knows.

Never at this kind of site: HW07 Battery system; HW13 Soil moisture probe; HW14 Temperature and humidity sensor.

The numbers on the data cable

Number	Device	What it is	Sheet
3	4 to 20 mA module	Waveshare Modbus RTU Analog Input 8CH. The platform calls it the Water I/O module	HW08
4	Load meter, or pump meter	Eastron SDM630 on the site's own consumption, or Eastron SDM230 on a single-phase pump	HW05 and HW06
5	Pump contact module	Waveshare Modbus RTU IO 8CH	HW09

Everything on the cable is set to 9600 baud, 8 data bits, no parity, 1 stop bit, and the converter to port 502, in Modbus TCP to RTU gateway mode. Every number is set at the office, before the kit leaves.

What the survey decides

Ask, or look	It decides
How tall is the tank inside, and does it hold drinking water?	The level transmitter’s range, and what it may be made of (sheet HW10)
What pressure does the pipe see?	The pressure transmitter’s range (sheet HW11)
Has the pump’s starter a spare contact that follows the pump?	Whether the pump contact module is fitted (sheet HW09)
Does the owner want to be told when the pump runs and no water flows?	The flow meter, which needs the pump’s contact as well (sheet HW12)
Does the owner want the pump’s electricity measured, and is the pump single-phase or three-phase?	The pump meter: the SDM230 for a single-phase pump, the SDM630 for a three-phase one, or none (sheets HW06 and HW05)
What does the pump do when the tank is low and when it is full, and who is told today?	Nothing to buy. Greecon only reports: the float switches and trips already there stay the safety layer
Is there internet the box may use, where the enclosure will be?	The cellular router (sheet HW04)

The whole job at this kind of site, from the survey to the handover, is in the site pack for a water tank and pump station (PDF 07).